

### ■电机性能参数 MOTOR PERFORMANCE PARAMETERS

型号 Model	电压 Voltage	功率 Power	空载参数 No-load Parameters		负载参数 Load Parameters			电机重量 Motor Weight
			转速 Speed r/min	电流 Current A	转速 Speed r/min	力矩 Torque mN.m	电流 Current A	
ZDXJ220550-20S	220	550	1750	Max1.0	1300	3.5	3.50	10
ZDXJ24550-20S	24	550	1750	Max3.5	1300	3.5	32.0	10
ZDXJ36350-20S	36	350	1750	Max2.5	1300	2.2	13.5	9.5
ZDXJ24350-20S	24	350	1750	Max3.5	1300	2.2	20.0	9.5

### ■主要技术要求

电机空载噪音:  $< 65\text{dB}$ ,  $L=100\text{cm}$   
 耐压:  
 DC24V(AC660V, 1S)  
 DC220V(AC1500V, 1S)  
 泄漏电流:  $< 10\text{mA}$   
 绝缘电阻:  $> 50\text{M}\Omega$  500V  
 使用寿命: 1000H


### ■MAIN DATA

No-load noise of motor:  $< 65\text{dB}$ ,  $L=100\text{cm}$   
 Voltage endurance:  
 DC24V(AC660V, 1S)  
 DC220V(AC1500V, 1S)  
 Leaking current:  $< 10\text{mA}$   
 Insulation resistance:  $> 50\text{M}\Omega$  500V  
 Life: 1000H

电动机型号 Motor model	减速器型号 Gearhead model	减速比 Gear Ratio
ZDXJ220550-20S	GX□	7 & 5.2
ZDXJ24550-20S		
ZDXJ36350-20S		
ZDXJ24350-20S		

减速器型号的□中为减速比的数值

Enter the gear ratio in the box(□)within the model name

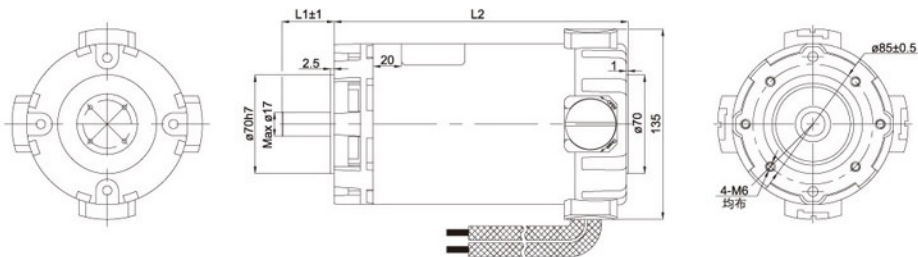

### ■电机性能参数 MOTOR PERFORMANCE PARAMETERS


型号 Mode	电压 Voltage	功率 Power	空载参数No-load Parameters		负载参数Load Parameters			电机重量 Motor Weight
			转速Speed	电流Current	转速Speed	力矩Torque	电流Current	
	V	W	r/min	A	r/min	mN.m	A	kg
ZDSJ12150-21S	12	150	2200	Max3.0	2100	0.68	16.0	4.5
ZDSJ12150-25S	12	150	2800	Max3.0	2500	0.57	16.0	4.5
ZDSJ12250-25S	12	250	2800	Max3.0	2500	0.96	26.0	4.5
ZDSJ24300-21S	24	300	2400	Max2.5	2100	1.36	16.0	4.5
ZDSJ24380-20S	24	380	2400	Max2.5	2000	1.81	20.0	4.5
ZDSJ24400-20S	24	400	2400	Max2.5	2000	1.91	21.0	4.5
ZDSJ24450-15S	24	450	2000	Max2.5	1500	3.58	23.5	6.0
ZDSJ24550-20S	24	550	2400	Max2.5	2000	2.63	29.0	6.0
ZDSJ36350-18S	36	350	2200	Max2.0	1800	1.87	12.5	5.0
ZDSJ36500-20S	36	500	2400	Max2.0	2000	2.39	17.5	5.0

### ■主要技术要求

光机空载噪音: < 65dB, L=100cm  
 耐电压: AC660V, 1S  
 泄漏电流: < 10mA  
 绝缘电阻: > 50MΩ 500V  
 工作寿命: 1000H

### ■MAIN DATA

No-load noise of motor: < 65dB, L=100cm  
 Voltage endurance: AC660V, 1S  
 Leaking current: < 10mA  
 Insulation resistance: > 50MΩ 500V  
 Life: 1000H

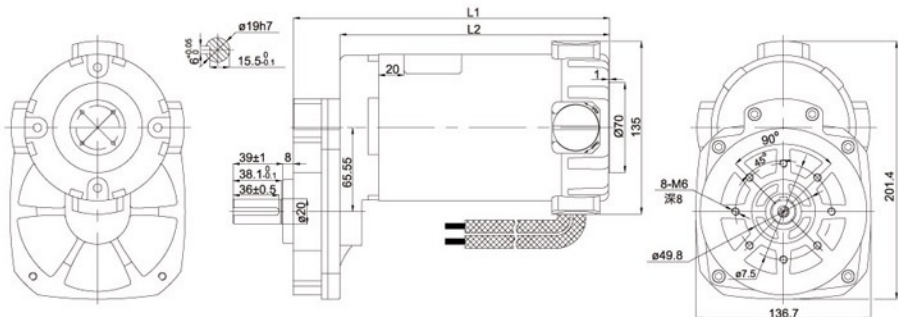

### 电机性能参数 MOTOR PERFORMANCE PARAMETERS

型号 Model	电压 Voltage	功率 Power	空载参数 No-load Parameters		负载参数 Load Parameters			电机重量 Motor Weight
			转速 Speed r/min	电流 Current A	转速 Speed r/min	力矩 Torque mN.m	电流 Current A	
ZDSJ12150-21S	12	150	2200	Max3.0	2100	0.88	16.0	4.5
ZDSJ12150-25S	12	150	2800	Max3.0	2500	0.57	16.0	4.5
ZDSJ12250-25S	12	250	2800	Max3.0	2500	0.96	26.0	4.5
ZDSJ24300-21S	24	300	2400	Max2.5	2100	1.36	16.0	4.5
ZDSJ24380-20S	24	380	2400	Max2.5	2000	1.81	20.0	4.5
ZDSJ24400-20S	24	400	2400	Max2.5	2000	1.91	21.0	4.5
ZDSJ24450-15S	24	450	2000	Max2.5	1500	3.58	23.5	6.0
ZDSJ24550-20S	24	550	2400	Max2.5	2000	2.63	29.0	6.0
ZDSJ36350-18S	36	350	2200	Max2.0	1800	1.87	12.5	5.0
ZDSJ36500-20S	36	500	2400	Max2.0	2000	2.39	17.5	5.0

电动机型号 Motor model	ZDSJ12150-21S	ZDSJ12150-25S	ZDSJ12250-25S	ZDSJ24300-21S	ZDSJ24380-20S
	ZDSJ24400-20S	ZDSJ24450-15S	ZDSJ24550-20S	ZDSJ36350-18S	ZDSJ36500-20S
减速器型号 Gearhead model	GX□				
减速比 Gear Ratio	7 & 10				

减速器型号的□中为减速比的数值 Enter the gear ratio in the box(□)within the model name

### 主要技术要求 MAIN DATA

光机空载噪音:  $< 65dB$ ,  $L=100cm$   
 耐电压: AC660V, 1S  
 泄漏电流:  $< 10mA$   
 绝缘电阻:  $> 50M\Omega$  500V  
 工作寿命: 1000H  
 No-load noise of motor:  $< 65dB$ ,  $L=100cm$   
 Voltage endurance: AC660V, 1S  
 Leaking current:  $< 10mA$   
 Insulation resistance:  $> 50M\Omega$  500V  
 Life: 1000H